



Security Simplified

Plug & Play, setup in minutes

Controlled by free App on smart phone

Supports up to 30 sensors, 10 remotes and unlimited cameras*


Battery backup alarm in case of power outage

No monitoring fees

*Subject to bandwidth each camera requires a min of 2 Mbits per second per camera



www.smanos.com

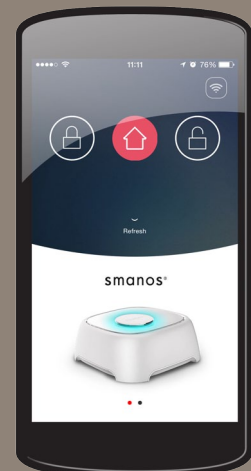

© 2015, Smanos, Inc.

daveco[®]

DNPR422

Exclusive Canadian Distributor:

5720 Ferrier, Montreal, Qc, Canada, H4P 1M7

Tel.: (800) 461-2112 ♦ Fax.: (514) 342-7876 ♦ info@davecohiFi.com

smanos[®]

18-W020

W020 WiFi Alarm System

smanos[®]
Dream Big. Live Smart.

1 of 3 Specifications for item # W020 system		2 of 3 Specifications for item # W020 system	
Description:	WiFi Alarm System	Description:	Door / Window Sensor
Item #:	W020	Item#	DS2300
Power Input	DC12V 500mA	Power Supply	DC 3V (CR2032 button cell battery x 2)
Battery	AA 1.5V LR6 x 4pcs	Static Current	≤ 1 uA
Standby Current	<140mA	Alarm Current	≤ 10.5 mA
Alarm Current	<270mA	Transmitting Distance	≤ 80 m (open area/no interference)
Internal Siren	105dB (High Volume)	Radio Frequency	915 MHz (±75KHz)
Expandable Accessories	10 Remotes, 30 Accessories	Housing Material	ABS plastic
Radio Frequency	915MHz	Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)
Wireless Interface	Wi-Fi IEEE 802.11 b/g/n	Relative Humidity	≤80% (Non-condensing)
Housing Material:	ABS Plastic	Transmitter Dimensions (L x W x H)	72 x 28 x 10 mm
Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)	Magnet Dimensions (L x W x H)	58 x 14 x 9.5 mm
Relative Humidity	≤ 80% (non-condensing)		
Supported applications	Google Play, Apple Store	3 of 3 Specifications for item # W020 system	
Dimensions (LxWxH)	117 x 118.5 x 40.5mm	Description:	Remote Control
Warranty	1 Year	Item#	RE2300
UPC (item)	859756005063	Power Supply	DC 3V (CR2032 button cell battery x 1)
Package contents:	Quantity:	Transmit Current	≤ 9.5 mA
Control Base Unit	1	Transmit Distance	≤ 80 m (open area/no interference)
Remote Control	1	Radio Frequency	915 MHz (±75KHz)
Door/Window sensor	2	Housing Material	PC Plastic
Double-sided tape	2	Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)
AC Adapter	1	Relative Humidity	≤80% (Non-condensing)
Battery (AA)	4	Dimensions (LxWxH)	71 x 38 x 12 mm
Window Warning Decal	3		
User Guide	1		
Warranty	1		

